



TY-12-150

☆ SPECIFICATION	☆ CHARACTERISTICS
● NOMINAL VOLTAGE : 12 V	● CAPACITY 25 °C / 77 °F
● NOMINAL CAPACITY(20 hrs) : 150.0 Ah	20 hr @ 7.5 A : 150 Ah
● DIMENSIONS	10 hr @ 13.5 A : 135 Ah
TOTAL HEIGHT : 241 mm (9.49 inches)	5 hr @ 24.0 A : 120 Ah
CONTAINER HEIGHT : 241 mm (9.49 inches)	1 hr @ 90 A : 90 Ah
LENGTH : 483 mm (19.02 inches)	1 C @ 150 A : 75 Ah
WIDTH : 170 mm (6.69 inches)	● INTERNAL RESISTANCE(25°C , 77 °F) : 4.5 mΩ
WEIGHT : APPROX 47.1 kg (103.9 lbs)	● CHARGING VOLTAGE (25°C , 77 °F)
● MAX DISCHARGE CURRENT : 1200 A (5 sec)	STANDBY USE : 2.275±0.025 V/CELL
● MAX SHORT- DURATION DISCHARGE CURRENT : 3000 A(0.1 sec)	: (-3.3mV / °C / CELL)
● STANDARD TERMINALS : FP-20/RT-19	CYCLE USE : 2.45±0.05 V/CELL
● CONTAINER MATERIAL : GENERAL GRADE ABS	: (-5 mV / °C / CELL)
	● MAX CHARGING CURRENT : 45 A


Discharge Characteristics 25 °C (77 °F)

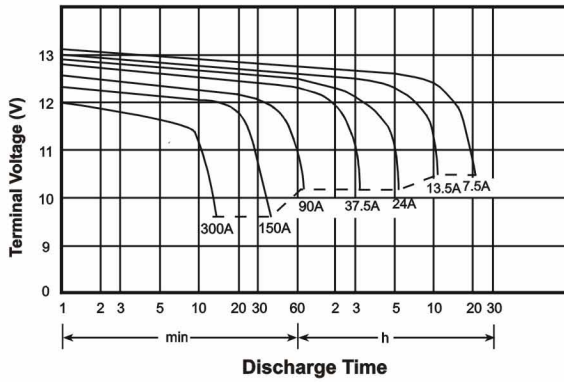

OPEN CIRCUIT VOLTAGE VS REMAINING CAPACITY

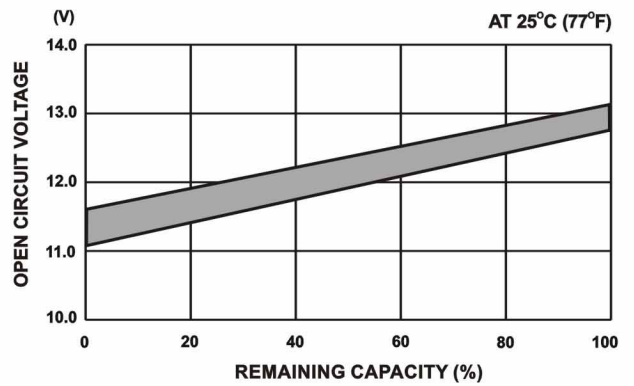

☆ Dimensions

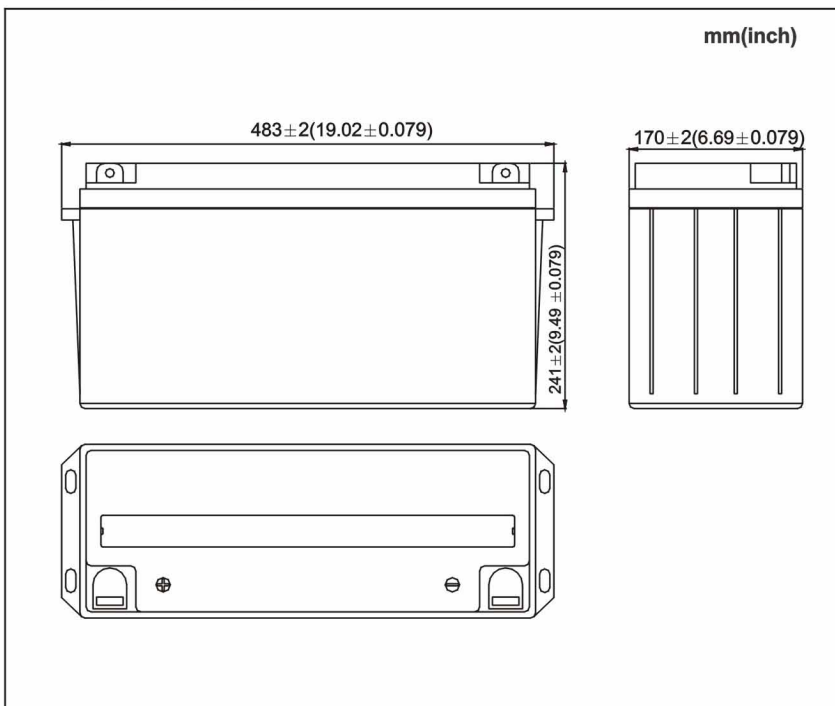

☆ Terminal

