

TYSONIC NON-SPILLABLE SEALED RECHARGEABLE BATTERY

TY12750 12V, 75.0Ah


☆ SPECIFICATION

- NOMINAL VOLTAGE : 12 V
- NOMINAL CAPACITY(20 hr) : 75.0 Ah
- DIMENSIONS
 - TOTAL HEIGHT : 232.5 mm (9.15 inches)
 - CONTAINER HEIGHT : 207.5 mm (8.17 inches)
 - LENGTH : 259 mm (10.20 inches)
 - WIDTH : 168 mm (6.61 inches)
- WEIGHT : APPROX 26.5 Kg (58.42 lbs)
- MAX DISCHARGE CURRENT : 600 A (5 sec)
- STANDARD TERMINALS : FP-12
- CONTAINER MATERIAL : GENERAL GRADE ABS


☆ CHARACTERISTICS

- CAPACITY 25 C / 77 F
 - 10 hr @ 7.5 A : 75 Ah
 - 5 hr @ 12 A : 60 Ah
 - 1 hr @ 45 A : 45 Ah
 - 1 C @ 75 A : 37.5 Ah
- INTERNAL RESISTANCE() : 7.5 mΩ @ 25°C, 77 F Ω
- CHARGING VOLTAGE (25C , 77 F°)
 - STANDBY USE : 2.275 0.025 V/CELL
 - : (-3.3mV / C / CELL)
 - CYCLE USE : 2.45 0.05 V/CELL
 - : (-5 mV / C / CELL) °
- MAX CHARGING CURRENT : 22.5 A


Discharge Characteristics 25 C (77) ° F

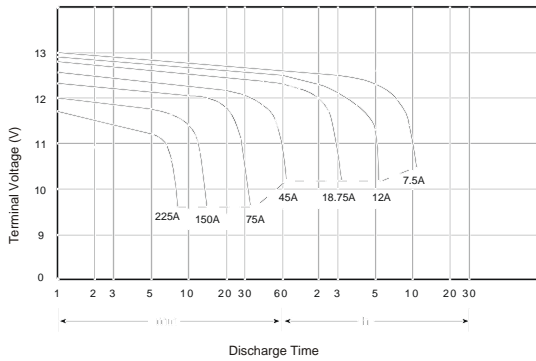

Discharge Current vs Time

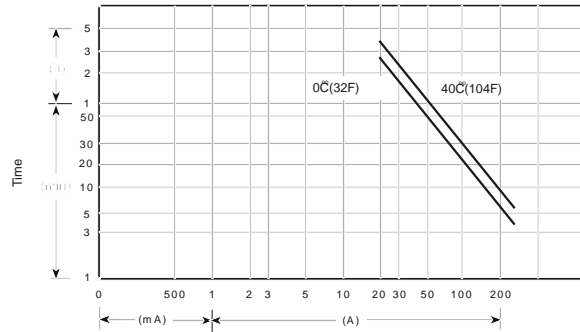

☆ Dimensions

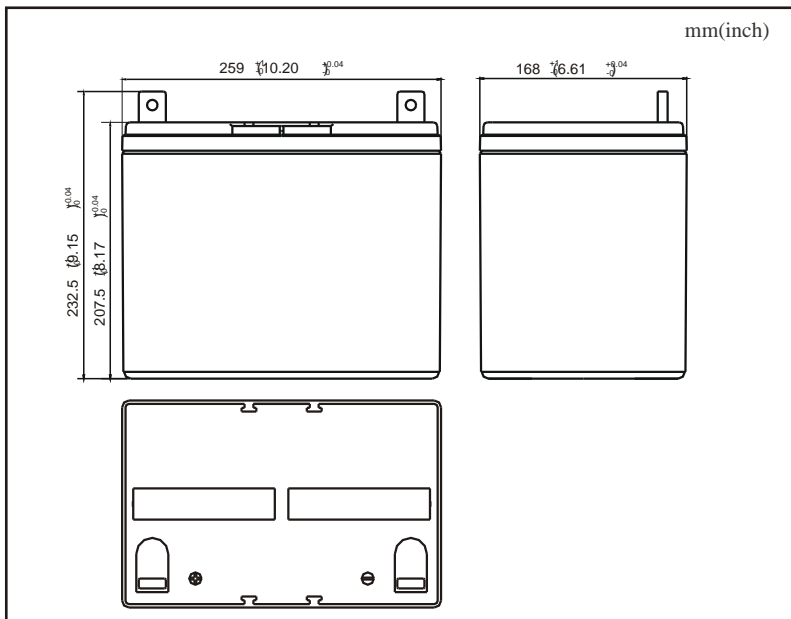

☆ Terminal

