

TYSONIC NON-SPILLABLE SEALED RECHARGEABLE BATTERY

TY610 6V, 1.0Ah


☆ SPECIFICATION

- NOMINAL VOLTAGE : 6 V
- NOMINAL CAPACITY(20 hrs) : 1.0 Ah
- DIMENSIONS
 - TOTAL HEIGHT : 58 mm (2.28 inches)
 - CONTAINER HEIGHT : 51 mm (2.01 inches)
 - LENGTH : 51 mm (2.01 inches)
 - WIDTH : 42 mm (1.65 inches)
- WEIGHT : APPROX 0.28 Kg (0.62 lbs)
- MAX DISCHARGE CURRENT : 10 A (5 sec)
- STANDARD TERMINALS : FO-01
- CONTAINER MATERIAL : GENERAL GRADE ABS


☆ CHARACTERISTICS

- CAPACITY 25 C / 77 F
 - 20 hr @ 0.05 A : 1.0 Ah
 - 5 hr @ 0.16 A : 0.96 Ah
 - 1 hr @ 0.6 A : 0.72 Ah
 - 1 C @ 1.0 A : 0.6 Ah
- INTERNAL RESISTANCE() : 50 mΩ, 77 F Ω
- CHARGING VOLTAGE (25C , 77 F°)
 - STANDBY USE : 2.2750.025 V/CELL
 - : (-3.3mV / C / CELL)
 - CYCLE USE : 2.450.05 V/CELL
 - : (-5 mV / C / CELL)
- MAX CHARGING CURRENT : 0.30 A


Discharge Characteristics 25 C (77 F°)

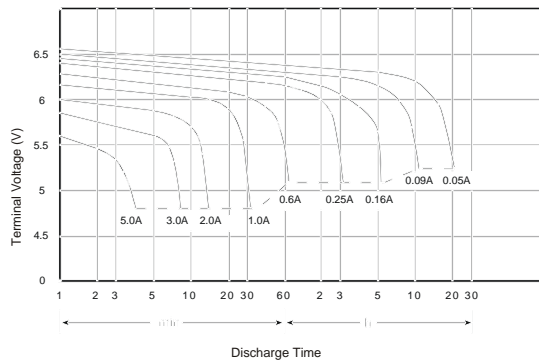

Discharge Current vs Time

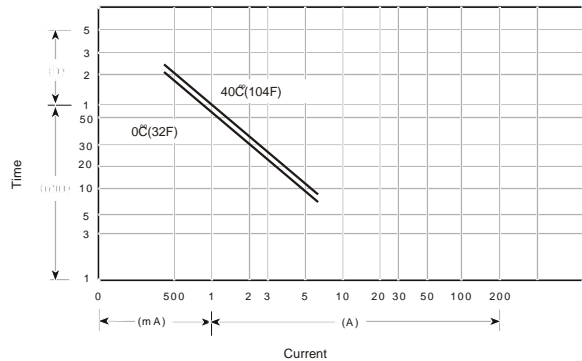

☆ Dimensions

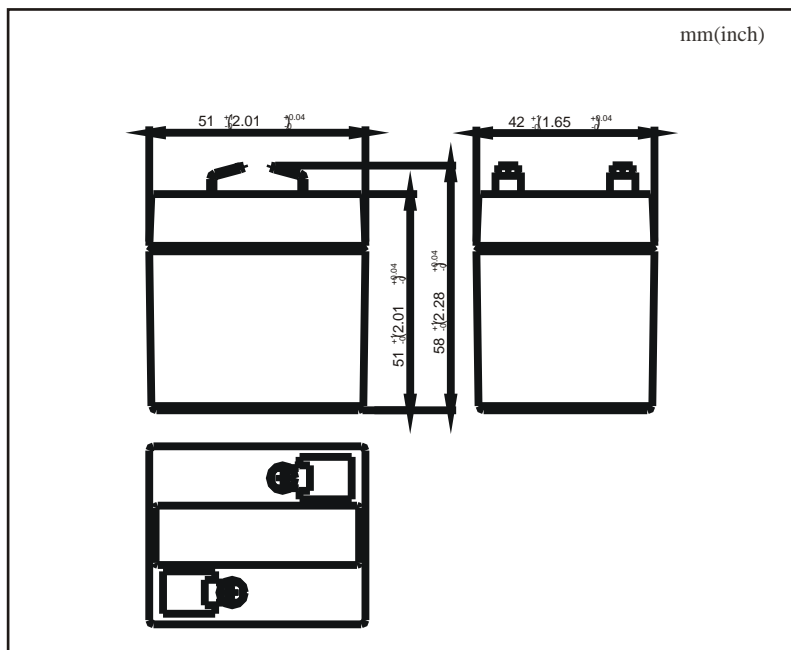

☆ Terminal

