




NON-SPILLABLE SEALED RECHARGEABLE BATTERY


EV12260

| ☆ SPECIFICATION | ☆ CHARACTERISTICS |
|--|---|
| ● NOMINAL VOLTAGE : 12 V | ● CAPACITY 25°C / 77°F |
| ● NOMINAL CAPACITY(20 hrs) : 26.0 Ah | 20 hr @ 1.3 A : 26 Ah |
| ● DIMENSIONS | 10 hr @ 2.34 A : 23.4 Ah |
| TOTAL HEIGHT : 125 mm (4.92 inches) | 5 hr @ 4.16 A : 20.8 Ah |
| CONTAINER HEIGHT : 125 mm (4.92 inches) | 1 hr @ 15.6 A : 15.6 Ah |
| LENGTH : 166 mm (6.54 inches) | 1 C @ 26 A : 13 Ah |
| WIDTH : 175 mm (6.89 inches) | ● INTERNAL RESISTANCE(25°C , 77 °F) : 10 mΩ |
| WEIGHT : APPROX 9.98 kg (22.0 lbs) | ● CHARGING VOLTAGE (25°C , 77 °F) |
| ● MAX DISCHARGE CURRENT : 260 A (5 sec) | STANDBY USE : 2.275±0.025 V/CELL |
| ● MAX SHORT- DURATION DISCHARGE CURRENT : 780 A(0.1 sec) | : (-3.3mV / °C / CELL) |
| ● STANDARD TERMINALS : RT-05 | CYCLE USE : 2.45±0.05 V/CELL |
| ● CONTAINER MATERIAL : GENERAL GRADE ABS | : (-5 mV / °C / CELL) |
| | ● MAX CHARGING CURRENT : 7.8 A |


Discharge Characteristics 25 °C (77 °F)

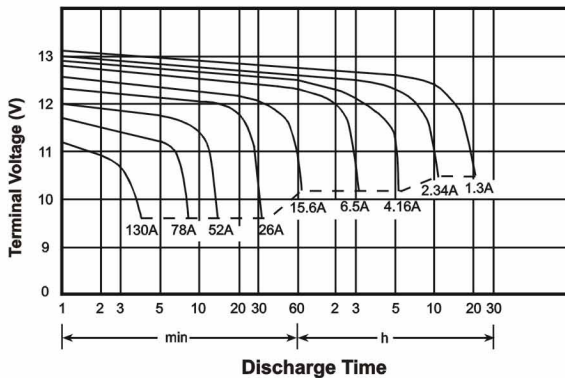

OPEN CIRCUIT VOLTAGE VS REMAINING CAPACITY

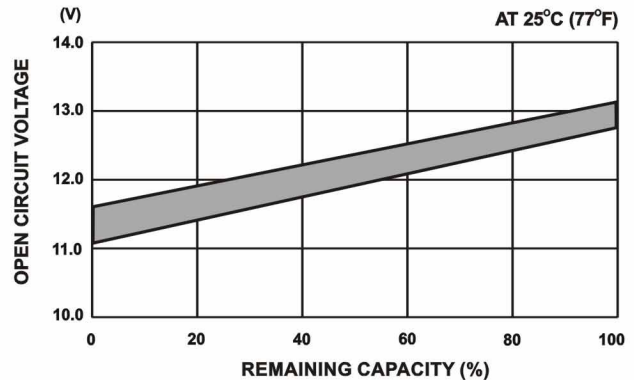

☆ Dimensions

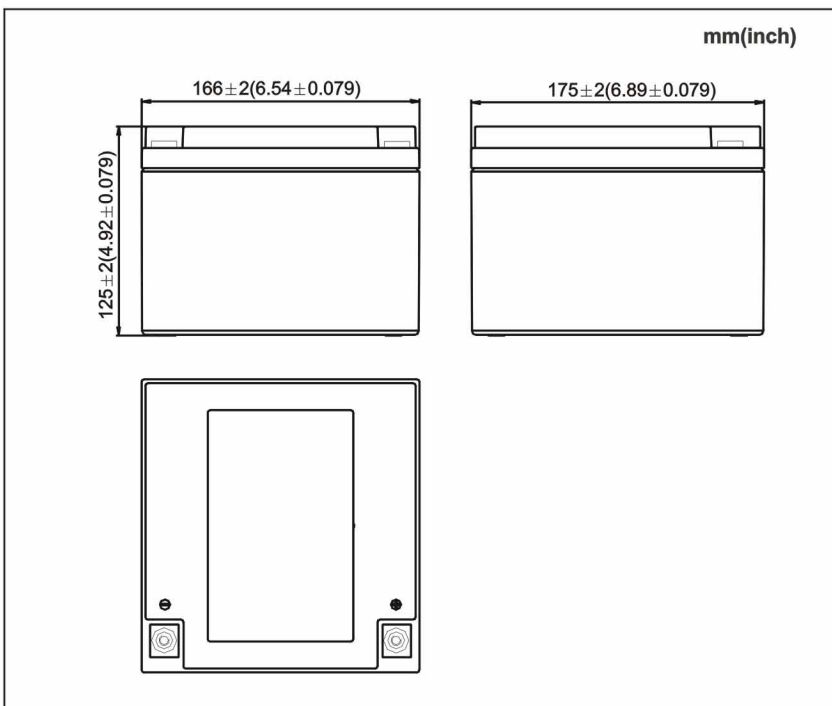

☆ Terminal

