




NON-SPILLABLE SEALED RECHARGEABLE BATTERY


EV12330

☆ SPECIFICATION	☆ CHARACTERISTICS
● NOMINAL VOLTAGE : 12V	● CAPACITY 25 °C / 77 °F
● NOMINAL CAPACITY(20 hrs) : 33Ah	20 hr @ 1.65 A : 33 Ah
● DIMENSIONS	10 hr @ 2.97 A : 29.7 Ah
TOTAL HEIGHT : 179 mm (7.05 inches)	5 hr @ 5.28 A : 26.4 Ah
CONTAINER HEIGHT : 158 mm (6.22inches)	1 hr @ 19.8 A : 19.8 Ah
LENGTH : 195.5 mm (7.70 inches)	1 C @ 33 A : 16.5 Ah
WIDTH : 130 mm (5.12 inches)	● INTERNAL RESISTANCE (25°C , 77 °F): 13 mΩ
WEIGHT : APPROX 11.94 kg (26.32 lbs)	● CHARGING VOLTAGE (25°C , 77 °F)
● MAX DISCHARGE CURRENT : 264A (5 sec)	STANDBY USE : 2.275±0.025 V/CELL
● MAX SHORT- DURATION DISCHARGE CURRENT : 660 A(0.1 sec)	: (-3.3mV / °C / CELL)
● STANDARD TERMINALS :FP-18 / RT-17 / FO-21	CYCLE USE : 2.45±0.025 V/CELL
● CONTAINER MATERIAL : GENERAL GRADE ABS	: (-5mV / °C / CELL)
	● MAX CHARGING CURRENT : 9.9 A


Discharge Characteristics 25 °C (77 °F)

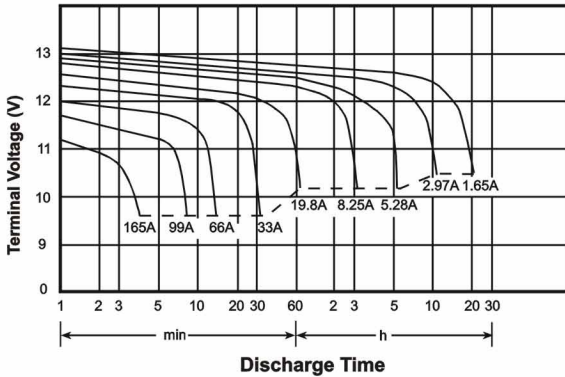

OPEN CIRCUIT VOLTAGE VS REMAINING CAPACITY

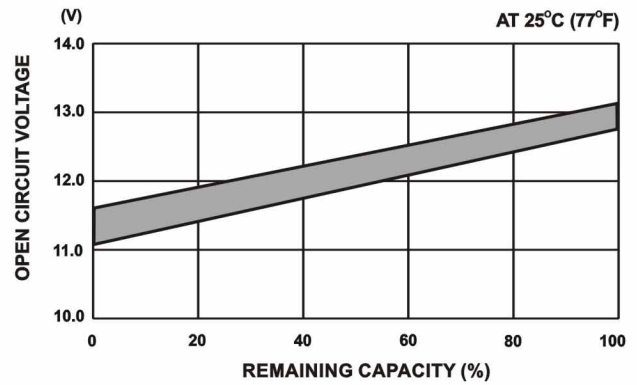

☆ Dimensions

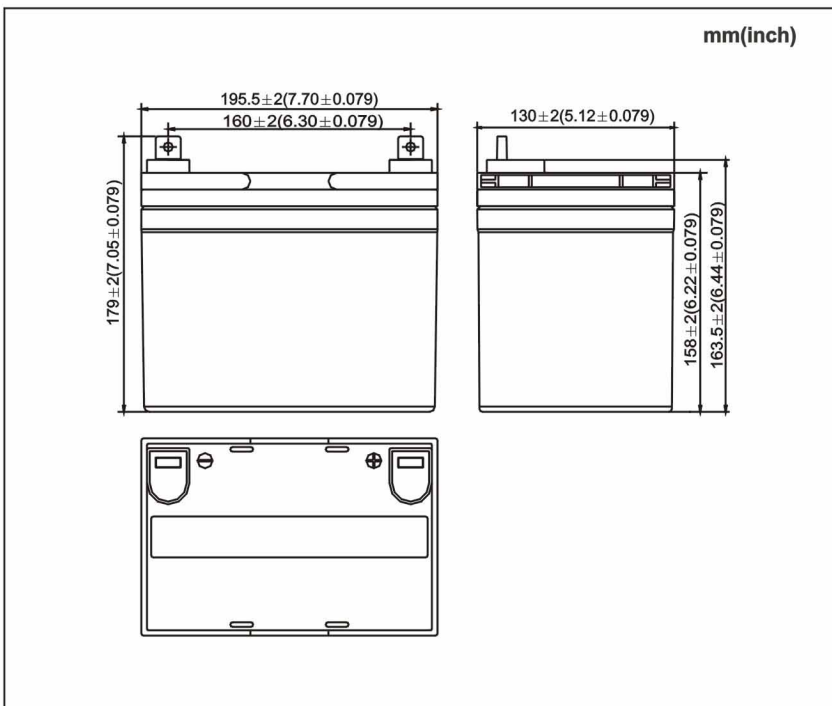

☆ Terminal

