




NON-SPILLABLE SEALED RECHARGEABLE BATTERY


# GEL122000AAG 12V, 200Ah

☆ SPECIFICATION	☆ CHARACTERISTICS
● NOMINAL VOLTAGE : 12 V	● CAPACITY 25 °C / 77 °F
● NOMINAL CAPACITY(10 hrs) : 200.0 Ah	10 hr @ 20 A : 200 Ah
● DIMENSIONS	5 hr @ 32 A : 160 Ah
TOTAL HEIGHT : 245 mm ( 9.65 inches )	3 hr @ 50 A : 150 Ah
CONTAINER HEIGHT : 218 mm ( 8.58 inches )	1 hr @ 120 A : 120 Ah
LENGTH : 518 mm ( 20.39 inches )	1 C @ 200 A : 100 Ah
WIDTH : 240 mm ( 9.45 inches )	● INTERNAL RESISTANCE( 25°C , 77 °F ) : 4.5 mΩ
WEIGHT : APPROX 64.10 kg ( 141.31 lbs )	● CHARGING VOLTAGE ( 25°C , 77 °F )
● MAX DISCHARGE CURRENT : 1600 A ( 5 sec )	STANDBY USE : 2.275 ± 0.025 V/CELL
● MAX SHORT- DURATION DISCHARGE CURRENT : 4000 A( 0.1 sec )	: (-3.3mV / °C / CELL)
● STANDARD TERMINALS : FP-30/RT-34	CYCLE USE : 2.45 ± 0.05 V/CELL
● CONTAINER MATERIAL : GENERAL GRADE ABS	: (-5 mV / °C / CELL)
	● MAX CHARGING CURRENT : 60 A


Discharge Characteristics 25 °C ( 77 °F )

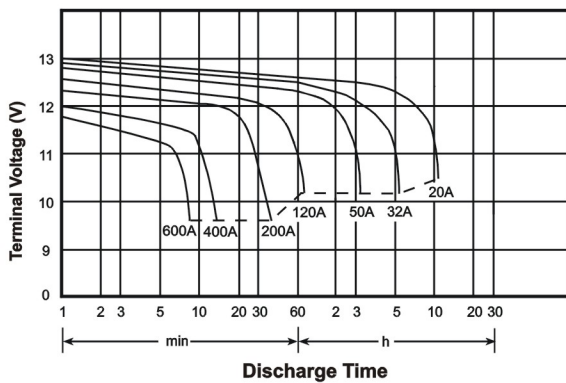

OPEN CIRCUIT VOLTAGE VS REMAINING CAPACITY

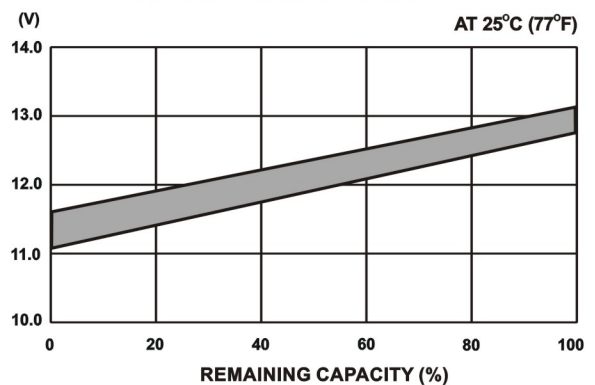

## ☆ Dimensions

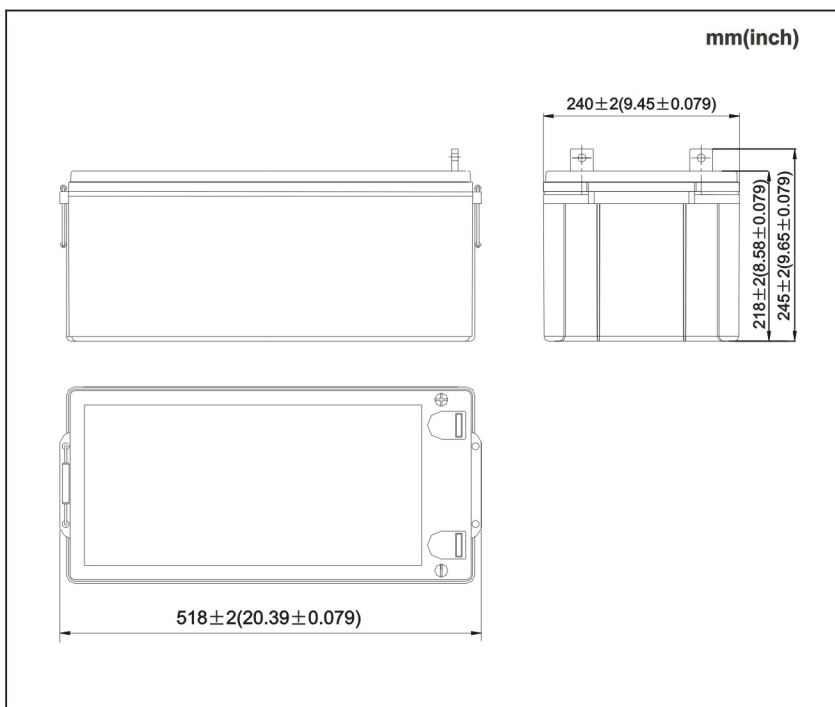

## ☆ Terminal

