




NON-SPILLABLE SEALED RECHARGEABLE BATTERY


12V 3.0Ah

☆ SPECIFICATION	☆ CHARACTERISTICS
● NOMINAL VOLTAGE : 12 V	● CAPACITY 25 °C / 77 °F
● NOMINAL CAPACITY(20 hrs) : 3 Ah	20 hr @ 0.15 A : 3.0 Ah
● DIMENSIONS	5 hr @ 0.27A : 2.70 Ah
TOTAL HEIGHT : 109.5 mm (4.31 inches)	5 hr @ 0.48 A : 2.40 Ah
CONTAINER HEIGHT : 102.7 mm (4.04 inches)	1 hr @ 1.80 A : 1.80 Ah
LENGTH : 141 mm (5.55 inches)	1 C @ 3.0 A : 1.50 Ah
WIDTH : 32 mm (1.26 inches)	● INTERNAL RESISTANCE (25°C , 77 °F) : 70 mΩ
WEIGHT : APPROX 1.41 kg (3.10 lbs)	● CHARGING VOLTAGE (25°C , 77 °F)
● MAX DISCHARGE CURRENT : 30 A (5 sec)	STANDBY USE : 2.275±0.025 V/CELL
● MAX SHORT- DURATION DISCHARGE CURRENT : 90 A (0.1 sec)	: (-3.3mV / °C / CELL)
● STANDARD TERMINALS : FO-01/FO-20	CYCLE USE : 2.45±0.025 V/CELL
● CONTAINER MATERIAL : GENERAL GRADE ABS	: (-3.3mV / °C / CELL)
	● MAX CHARGING CURRENT : 0.9 A


Discharge Characteristics 25 °C (77 °F)

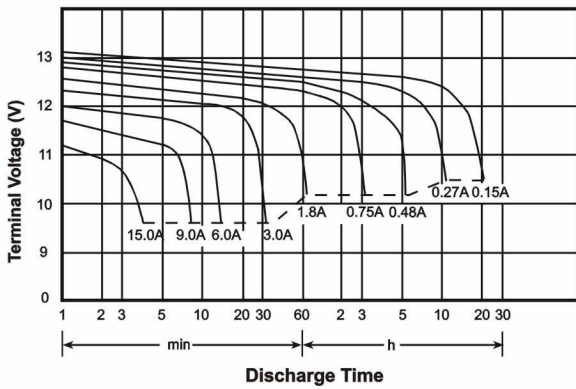

OPEN CIRCUIT VOLTAGE VS REMAINING CAPACITY

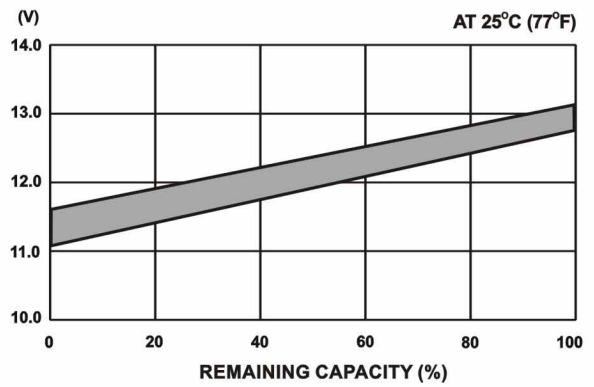

☆ Dimensions

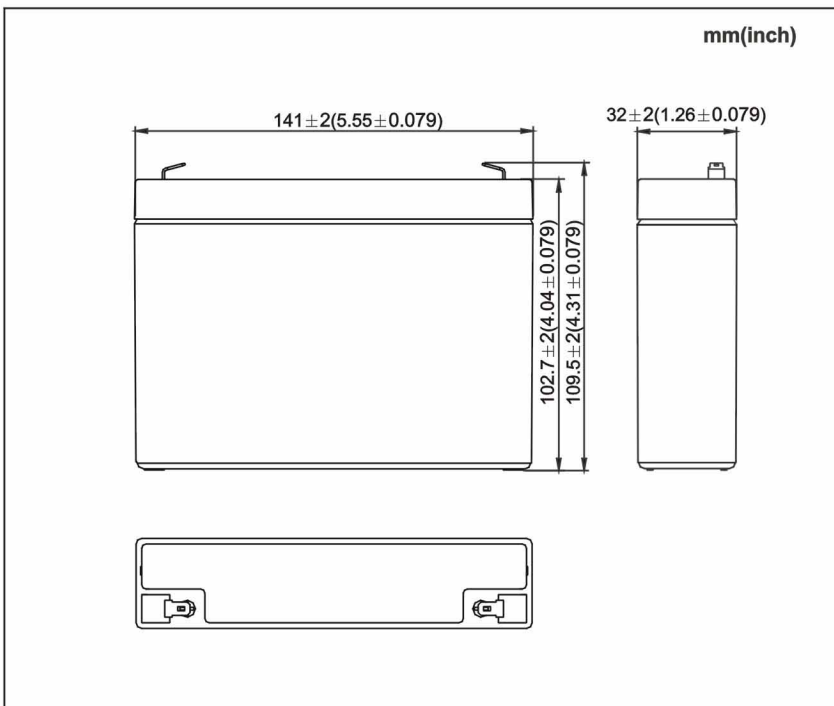

☆ Terminal

