




NON-SPILLABLE SEALED RECHARGEABLE BATTERY


12V 9.0Ah

☆ SPECIFICATION	☆ CHARACTERISTICS
● NOMINAL VOLTAGE : 12 V	● CAPACITY 25 °C / 77 °F
● NOMINAL CAPACITY(20 hrs) : 9 Ah	20 hr @ 0.45 A : 9.0 Ah
● DIMENSIONS	10 hr @ 0.81A : 8.1 Ah
TOTAL HEIGHT : 100 mm (3.94 inches)	5 hr @ 1.44 A : 7.2 Ah
CONTAINER HEIGHT : 94.4 mm (3.72 inches)	1 hr @ 5.4 A : 5.4 Ah
LENGTH : 151 mm (5.95 inches)	1 C @ 9.0 A : 4.5 Ah
WIDTH : 65 mm (2.56 inches)	● INTERNAL RESISTANCE(25°C , 77 °F) : 22 mΩ
WEIGHT : APPROX 2.75 kg (6.06 lbs)	● CHARGING VOLTAGE (25°C , 77 °F)
● MAX DISCHARGE CURRENT : 90 A (5 sec)	STANDBY USE : 2.275±0.025 V/CELL
● MAX SHORT- DURATION DISCHARGE CURRENT : 270 A(0.1 sec)	: (-3.3mV / °C / CELL)
● STANDARD TERMINALS : FO-02/FO-03	CYCLE USE : 2.45±0.05 V/CELL
● CONTAINER MATERIAL : GENERAL GRADE ABS	: (-5 mV / °C / CELL)
	● MAX CHARGING CURRENT : 2.7 A


Discharge Characteristics 25 °C (77 °F)

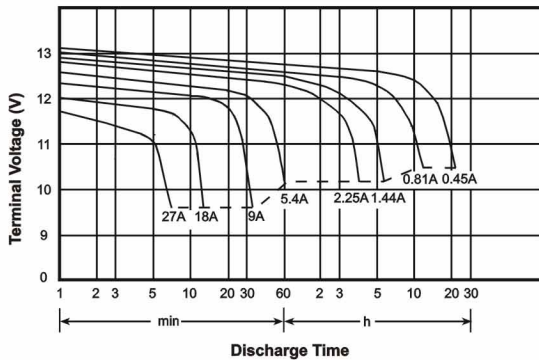

OPEN CIRCUIT VOLTAGE VS REMAINING CAPACITY

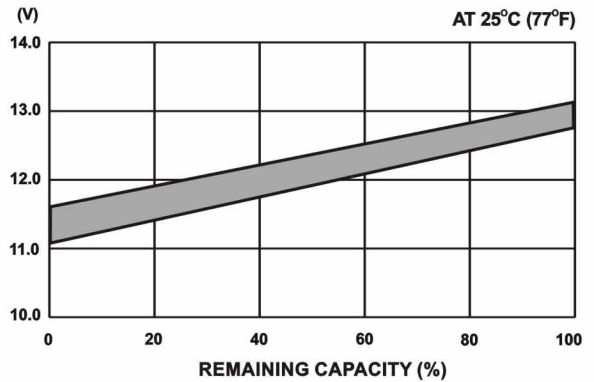

☆ Dimensions

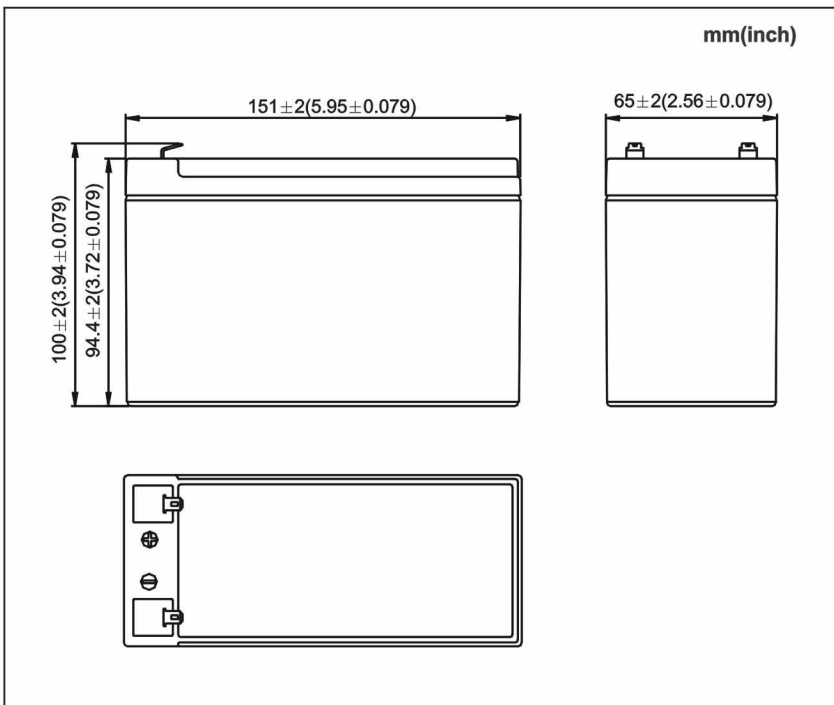

☆ Terminal

