
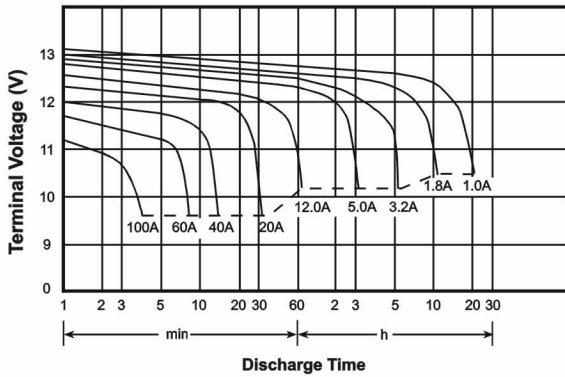
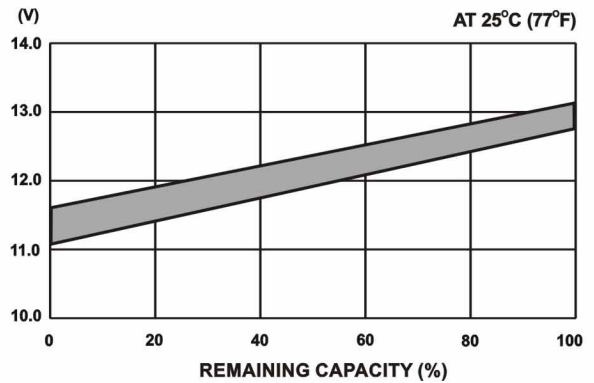


| ☆ SPECIFICATION | ☆ CHARACTERISTICS |
|--|---|
| ● NOMINAL VOLTAGE : 12 V | ● CAPACITY 25 °C / 77 °F |
| ● NOMINAL CAPACITY(20 hrs) : 20.0 Ah | 20 hr @ 1.0 A : 20.0 Ah |
| ● DIMENSIONS | 10 hr @ 1.8 A : 18.0 Ah |
| TOTAL HEIGHT : 167 mm (6.58 inches) | 5 hr @ 3.2 A : 16.0 Ah |
| CONTAINER HEIGHT : 167 mm (6.58 inches) | 1 hr @ 12.0 A : 12.0 Ah |
| LENGTH : 181 mm (7.13 inches) | 1 C @ 20.0 A : 10.0 Ah |
| WIDTH : 76.2 mm (3.0 inches) | ● INTERNAL RESISTANCE(25°C , 77 °F) : 13 mΩ |
| WEIGHT : APPROX 6.35 kg (14.0 lbs) | ● CHARGING VOLTAGE (25°C , 77 °F) |
| ● MAX DISCHARGE CURRENT : 190 A (5 sec) | STANDBY USE : 2.275 ± 0.025 V/CELL |
| ● MAX SHORT- DURATION DISCHARGE CURRENT : 500 A(0.1 sec) | : (-3.3mV / °C / CELL) |
| ● STANDARD TERMINALS : RT-08/FP-01 | CYCLE USE : 2.45 ± 0.05 V/CELL |
| ● CONTAINER MATERIAL : GENERAL GRADE ABS | : (-5 mV / °C / CELL) |
| : FLAME RETARDANT ABS | ● MAX CHARGING CURRENT : 6.0 A |

Discharge Characteristics 25 °C (77 °F)

OPEN CIRCUIT VOLTAGE VS REMAINING CAPACITY


☆ Dimensions

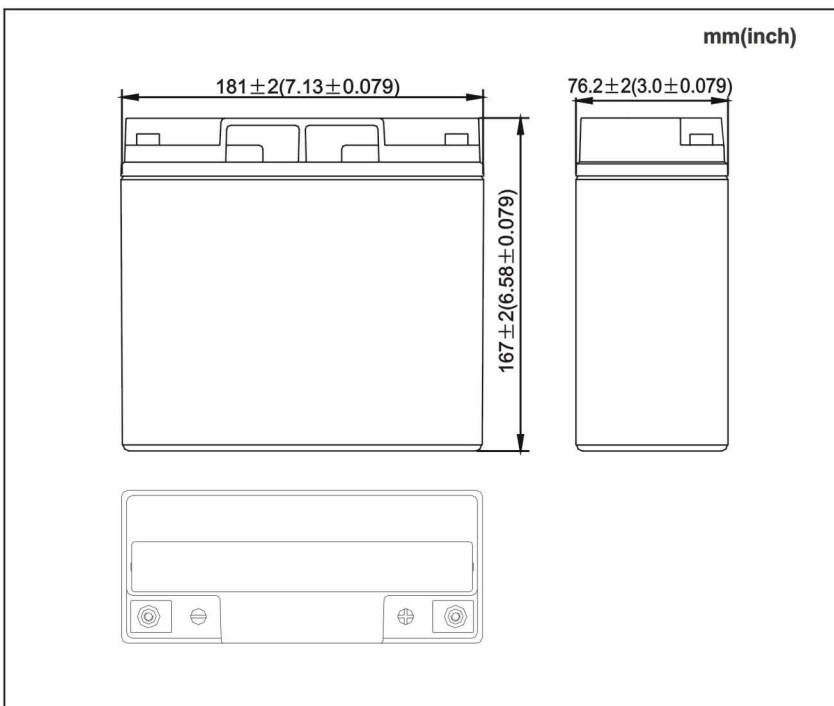

☆ Terminal

