

TYSONIC NON-SPILLABLE SEALED RECHARGEABLE BATTERY

TY122000 12V, 200Ah


☆ SPECIFICATION

- NOMINAL VOLTAGE : 12 V
- NOMINAL CAPACITY(20 hrs) : 200.0 Ah
- DIMENSIONS
 - TOTAL HEIGHT : 240 mm (9.45 inches)
 - CONTAINER HEIGHT : 210 mm (8.27 inches)
 - LENGTH : 521 mm (20.51 inches)
 - WIDTH : 260 mm (10.24 inches)
- WEIGHT : APPROX 78.00 Kg (171.96 lbs)
- MAX DISCHARGE CURRENT : 800 A (5 sec)
- STANDARD TERMINALS : FP-08
- CONTAINER MATERIAL : GENERAL GRADE ABS


☆ CHARACTERISTICS

- CAPACITY 25 C / 77 F
 - 10 hr @ 20 A : 200 Ah
 - 5 hr @ 32 A : 160 Ah
 - 1 hr @ 120 A : 120 Ah
 - 1 C @ 200 A : 100 Ah
- INTERNAL RESISTANCE() : 4 mΩ @ 25°C, 77 F Ω
- CHARGING VOLTAGE (25C, 77 F°)
 - STANDBY USE : 2.2750.025 V/CELL
 - : (-3.3mV / C / CELL)
 - CYCLE USE : 2.450.05 V/CELL
 - : (-5 mV / C / CELL)
- MAX CHARGING CURRENT : 60 A


Discharge Characteristics 25 C (77 F°)

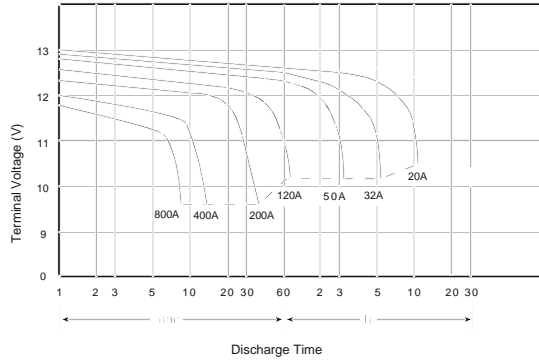

Discharge Current vs Time

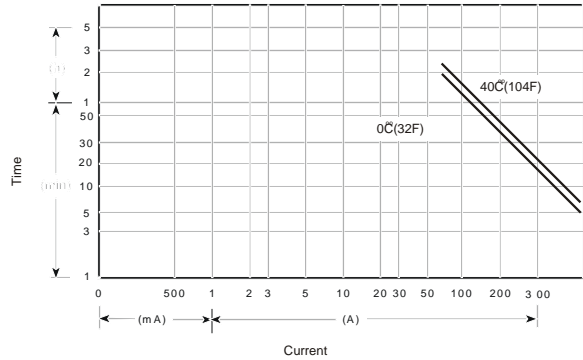

☆ Dimensions

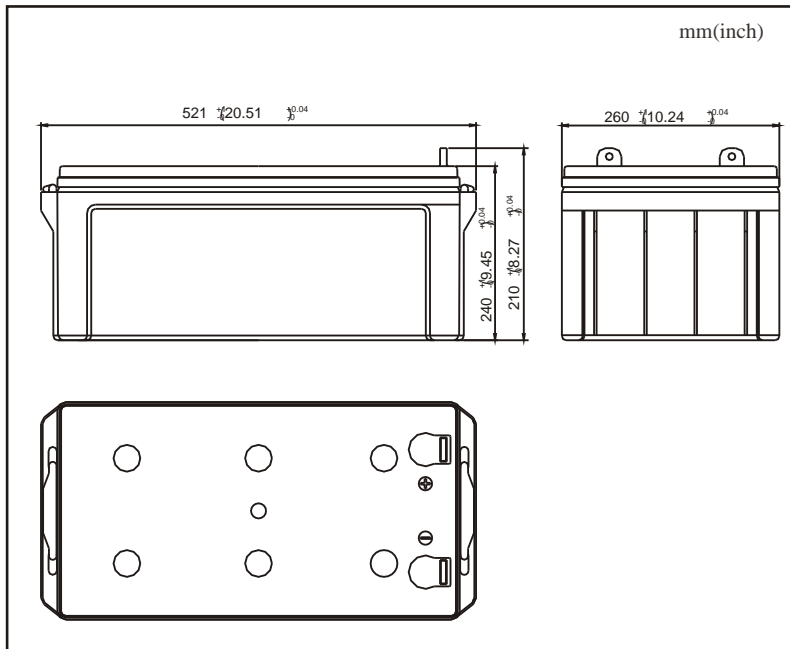

☆ Terminal

